



Product Details

PORTABLE SOLAR PANEL

BXF-N-D-2X50W

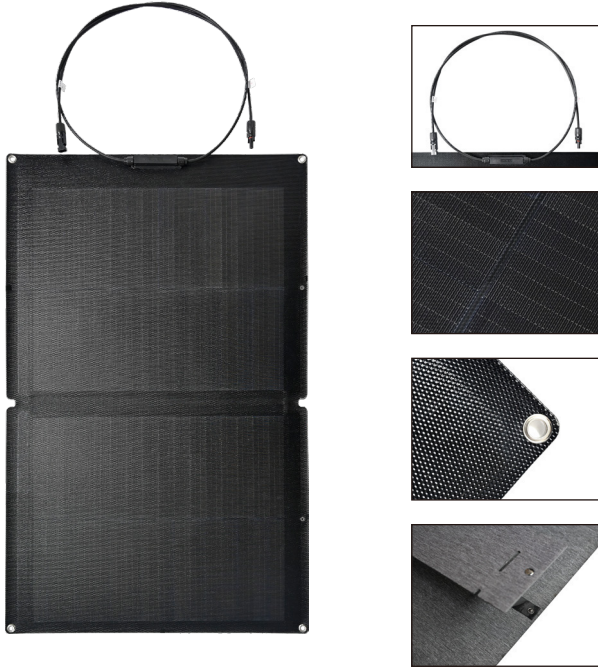

Module Diagram

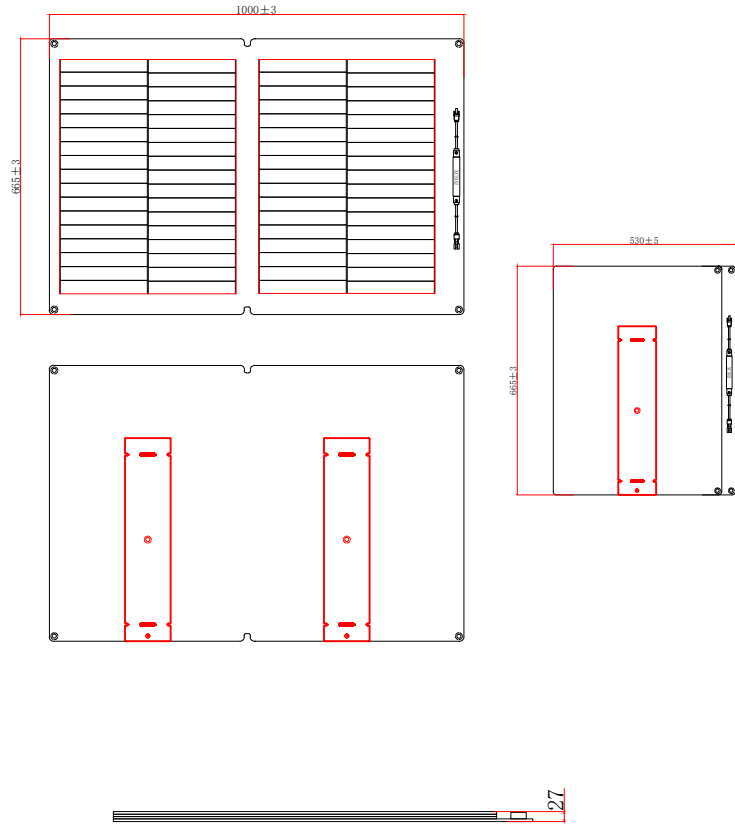

2*50W

Electrical Characteristics

Maximum power(Pmax)	100W
Open-circuit voltage(Voc)	22.9V
Voltage at Pmax(Vmp)	19.4V
Short-circuit current(Isc)	5.46A
Current at Pmax(Imp)	5.16A
Cells Efficiency(%)	22.00%
The maximum system voltage	100V DC(IEC)
Power temperature coefficient	-0.38%/°C
Voltage temperature coefficient	-0.36%/°C
Current temperature coefficient	0.05%/°C
Output power tolerance	±3%
Operating Temperature	-10°C~60°C


Product Introduction

BXF series adopts advanced technology and polymer material, which has stronger impact resistance and crack resistance, effectively extending the service life of solar panels. BXF series solar panels are lightweight and easy to carry and can be easily hung on backpacks and tents.

This is a super powerful panel to quickly get the energy you need from the sun with this solar cell phone charger mobile power. The large BXF Series portable solar panel allows you to charge multiple devices at the same time quickly. Charge your electronic devices on hikes, camping trips, and other outdoor activities. Compatible with iPhone, smartphones, or Android phones.

Specifications

Solar cell brand	A grade mono solar cells 210mm
No.of cells and connections	68(2*17*2)
Folding size	665*530*27mm
Development size	1000*665*18mm
Weight	3.2KG
Approvals	IP67
Certifications	CE, ROHS, FCC
Warranty	Warranty 1-year life 5 years

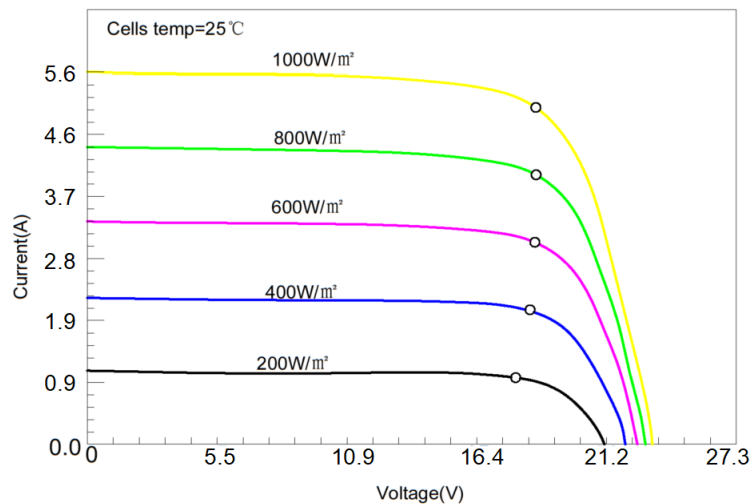

*SUNGOLD offer customize service, please refer to our website or ask SUNGOLD workers for more sizes and the latest parameters.